


# Stock grating panel

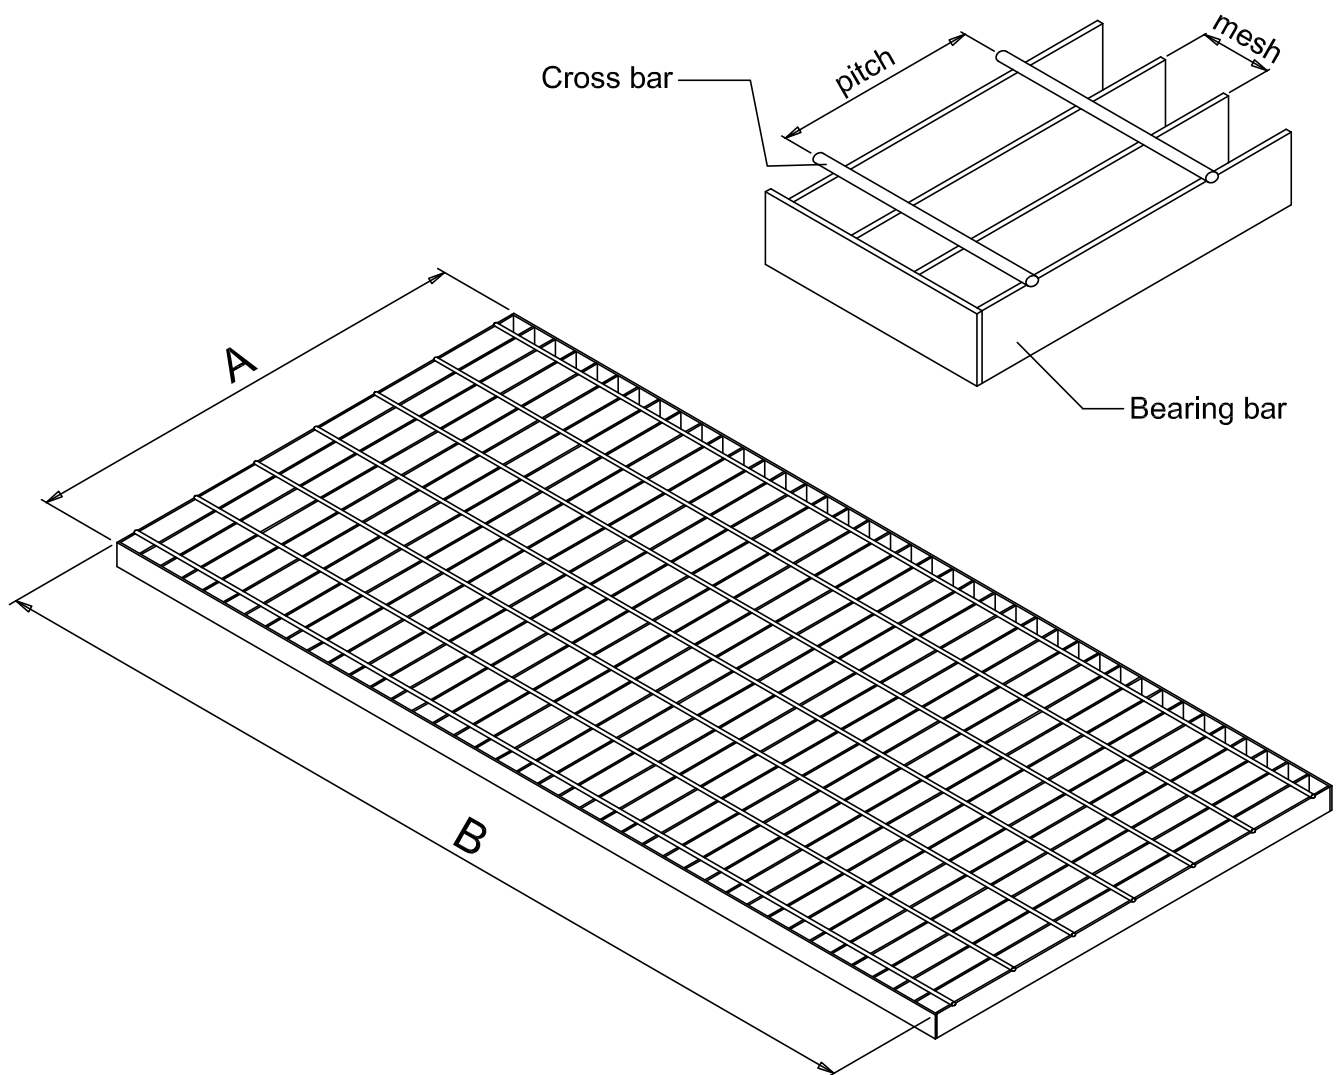

Bearing plat " (mm)	Mesh " (mm)	B " (mm)	A " (mm)	Weight lb/unit (kg/cad)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	5 7/8" (150)	10,6 (4,8)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	7 7/8" (200)	13,8 (6,3)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	9 13/16" (250)	16,9 (7,7)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	11 13/16" (300)	20,1 (9,1)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	15 3/4" (400)	26,2 (11,9)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	19 11/16" (500)	32,6 (14,8)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	23 5/8" (600)	38,8 (17,6)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	27 9/16" (700)	45,0 (20,4)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	31 1/2" (800)	51,4 (23,3)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	35 7/16" (900)	57,5 (26,1)
1" x 5/64" (25x2)	19/32" x 2 15/16" (15x76)	39 5/16" (999)	39 3/8" (1000)	63,9 (29,0)

Material: (Fe360B UNI 7070) S235 JR EN 10025

Surface treatment: hot dip galvanizing UNI EN ISO 1461